A – 2" FNPT COUPLING W/ 2" PIPE (INTERSTIAL MONITOR)
B – 2" FNPT F/G COUPLING (NORMAL VENT)
C – 6" FNPT F/G COUPLING (PRI. E-VENT)
D – 6" FNPT FITTING (SEC. E-VENT)
E – 4" MNPT NIPPLE (FILL)
F – 2" FNPT F/G COUPLING (GAUGE)
G – 2" FNPT F/G COUPLING (PROBE)
H – 2" FNPT F/G COUPLING (SPARE)
I – 2" FNPT F/G COUPLING (SUPPLY)
J – 2" FNPT F/G COUPLING (RETURN)
K – 2" FNPT FITTING (FIREGUARD MIX FILL)
L – 24" X 12" INTERNAL STUB UP
*** BEAMS CAN BE PROVIDED AS REQUIRED

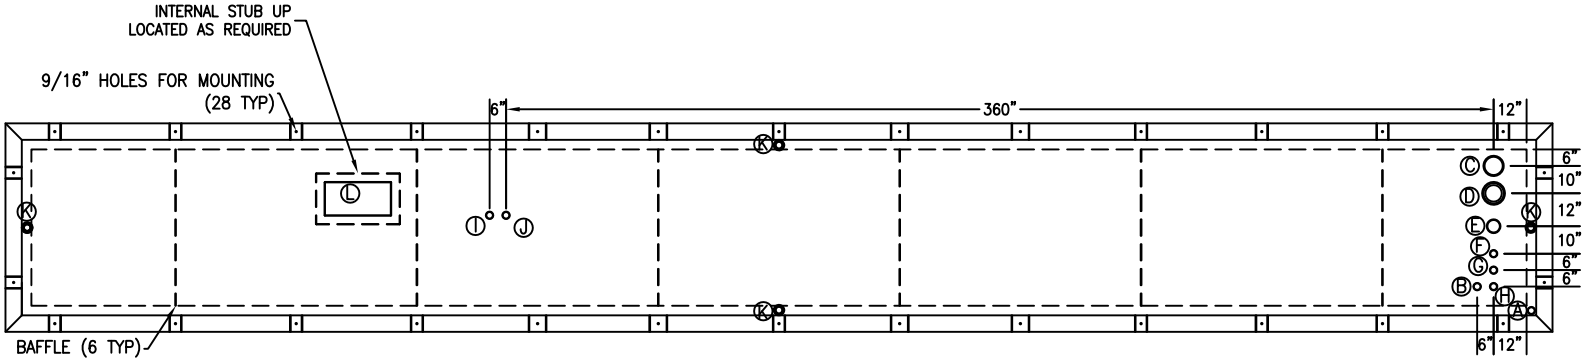


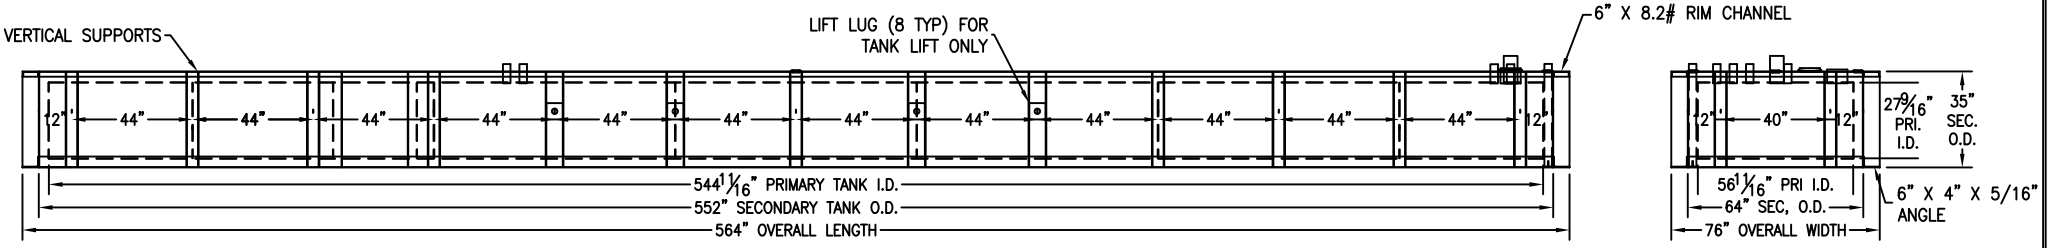


CUSTOMER APPROVAL SIGNATURE/DATE:

QUANTITY: ONE (1) REQUIRED
WEIGHT: 24,250 lb ± 10%

# 3,620 GAL (2,930USEABLE) GENBASE THERMALLY INSULATED STORAGE TANK

## SURFACE PREPARATION/COATING INFORMATION:

INTERIOR SURFACES:
N/A

EXTERIOR SURFACES:
SSPC-SP-6 COMMERCIAL BLAST CLEAN
ONE COAT DEVOE 205 EPOXY PRIMER @ 4mils DFT
ONE COAT DEVOE 359 WHITE URETHANE @ 6mils DFT
COAL TAR EPOXY ON EXTERIOR BOTTOM

## MATERIAL /CONSTRUCTION/ LABELING INFORMATION:

MATERIAL: CARBON STEEL ASTM A 36 OR ASTM A 569

MATERIAL THICKNESS: PRIMARY SHELL 7 GA
SECONDARY SIDE 7 GA

CONSTRUCTION IN ACCORDANCE WITH UNDERWRITERS LABORATORIES UL-2085 STANDARD FOR STEEL ABOVEGROUND STORAGE TANKS FOR FLAMMABLE AND COMBUSTIBLE LIQUIDS AND STEEL TANK INSTITUTE STANDARD F941 FIREGUARD THERMALLY INSULATED ABOVEGROUND STORAGE TANK

LABELING/MARKING: UNDERWRITERS LABORATORIES UL-2085

CUSTOMER:
PROJECT:
AGENT:


GENERAL INDUSTRIES
BUILDING TANKS TO PROTECT OUR ENVIRONMENT
P.O. BOX 1279 GOLDSBORO, NC 27533
PHONE: (919)751-1791 FAX: (919)751-8186


DRAWING NUMBER: GIPBG3620
REVISED 10/08