
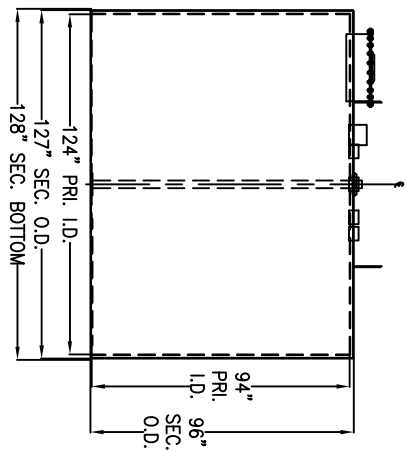


- A - 2" SCH 40 PIPE w/ 2" FNPT COUPLING AND 8" X 8" X 1/4" PLATE (INTERSTITIAL MONITOR / LEAK DETECTOR)
- B - 4" FNPT COUPLING (NORMAL VENT)
- C - 4" FNPT COUPLING (SUPPLY)
- D - 4" FNPT COUPLING (RETURN)
- E - 24" STANDARD MANWAY w/ 8" FNPT FITTING (PRIMARY EMERGENCY VENT OPENING)
- F - 8" FNPT FITTING (SECONDARY EMERGENCY VENT OPENING)
- G - 4" FNPT COUPLING (GAUGE STICK)
- H - 4" FNPT COUPLING (GAUGE/SPARE)
- I - 6" MNPT NIPPLE (FILL)
- J - 4" FNPT COUPLING (PROBE)
- K - LIFT LUG

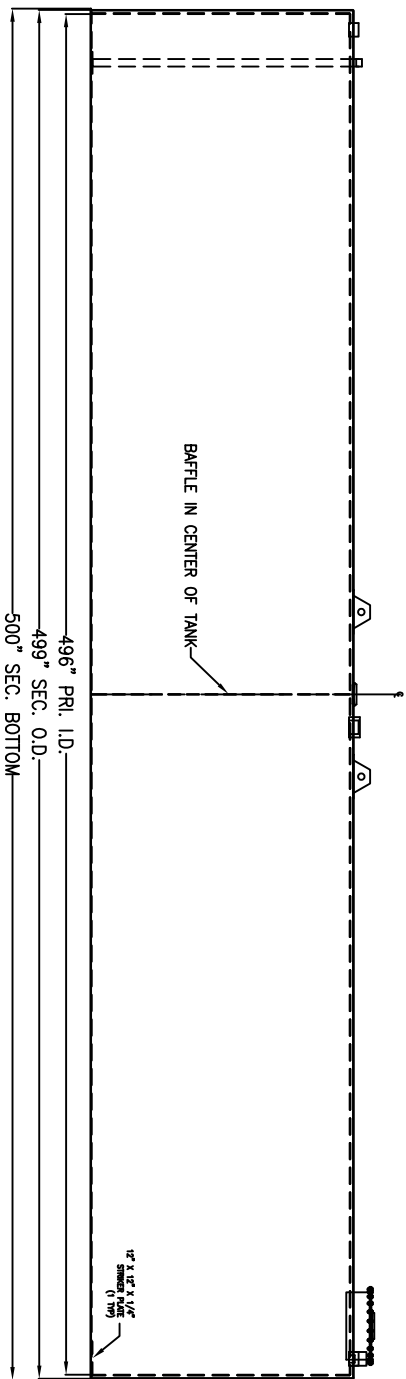

CUSTOMER APPROVAL SIGNATURE/DATE:

25,000 GALLON DW RECTANGULAR STORAGE TANK

**SURFACE PREPARATION/COATING INFORMATION:**

INTERIOR SURFACES: N/A  
EXTERIOR SURFACES: SSPC-SP-6 COMMERCIAL BLAST  
FINISH PAINT WHITE


**MATERIAL /CONSTRUCTION/ LABELING INFORMATION:**

MATERIAL: CARBON STEEL ASTM A 36 OR ASTM A 569  
MATERIAL THICKNESS: PRIMARY TANK: 1/4"  
SECONDARY TANK: 1/4"

QUANTITY: ONE (1) REQUIRED  
WEIGHT: 36,250 lbs ± 10%

LABELING/MARKING: UNDERWRITERS LABORATORIES UL-142 / SMR / SRI F-921

CUSTOMER: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
AGENT: \_\_\_\_\_



**GENERAL INDUSTRIES**  
BUILDING TANKS / TOWER TOWER TOWER TOWER TOWER  
P.O. BOX 1279 GOLDSPRING, NC 27533  
PHONE NUMBER: (919) 751-1791 FAX: (919) 751-8188